



TECHNISCHE FICHE

HALF RONDE HANGGOOT GHR333S MET SLAB

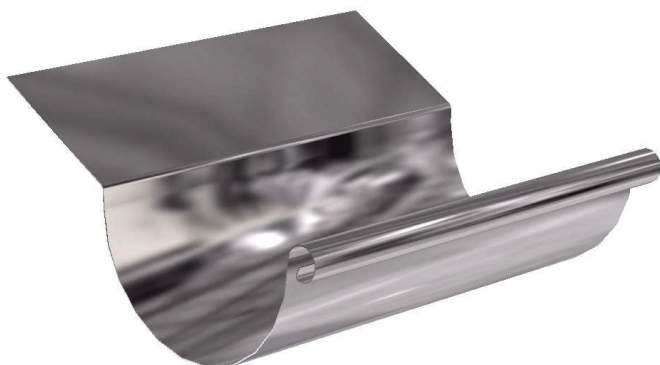

art nr	materiaal	dikte	lengte	gewicht
GHR333S-K7	koper (NEN-EN1172)	0.7 mm	5 m	± 12,4 kg
GHR333S-K8	koper (NEN-EN1172)	0.8 mm	5 m	± 14,2 kg
GHR333S-Z8	zink (NEN-EN988)	0.8 mm	5 m	± 11,5 kg
GHR333S-Z1	zink (NEN-EN988)	1 mm	5 m	± 14,4 kg
GHR333S-Q8	zink patina lichtgrijs (NEN-EN988)	0.8 mm	5 m	± 11,5 kg
GHR333S-A8	zink patina donkergrijs (NEN-EN988)	0.8 mm	5 m	± 11,5 kg

De bevestiging van de hanggoten gebeurt met goothaken.

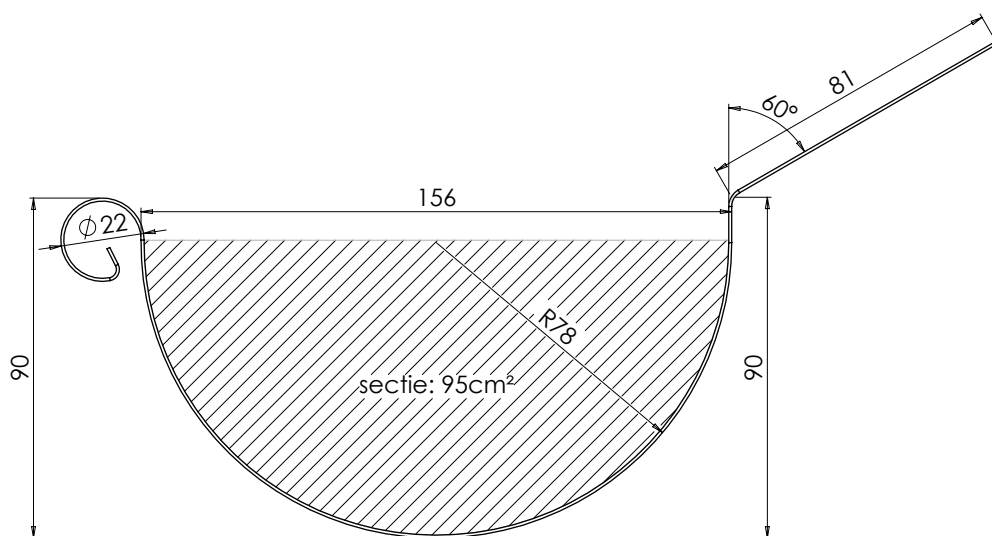

Synoniem van KWALITEIT en SERVICE

APOK KAMPENHOUT
administratieve hoofdzetel
Oudestraat 11, B-1910 Kampenhout
Tel.: +32 (0)16 61 72 62 - Fax: +32(0)16 61 72 81
Website: www.apok.be - E-mail: info@apok.be

APOK