


TECHNISCHE FICHE

RONDE AFVOERBUIS BSR120 NAADLOOS GELAST



art nr	materiaal	dikte	lengte (L)	gewicht
BSR120-A8	zink patina donkergrijs (NEN-EN988) gesoldeerd	0.8 mm	1 m	2.2 kg
BSR120-A7/2	zink patina donkergrijs (NEN-EN988)	0.7 mm	2 m	3.8 kg
BSR120-K7/2	koper (NEN-EN1172)	0.7 mm	2 m	4.7 kg
BSR120-K8	koper (NEN-EN1172) gesoldeerd	0.8 mm	1 m	2.7 kg
BSR120-Q8	zink patina lichtgrijs (NEN-EN988) gesoldeerd	0.8 mm	1 m	2.2 kg
BSR120-Q7/2	zink patina lichtgrijs (NEN-EN988)	0.7 mm	2 m	3.8 kg
BSR120-Z1	zink (NEN-EN988) gesoldeerd	1.0 mm	1 m	2.7 kg
BSR120-Z7/2	zink (NEN-EN988)	0.7 mm	2 m	3.8 kg
BSR120-Z8	zink (NEN-EN988) gesoldeerd	0.8 mm	1 m	2.2 kg

De bevestiging van de afvoerbuizen gebeurt met scharnierhaken.

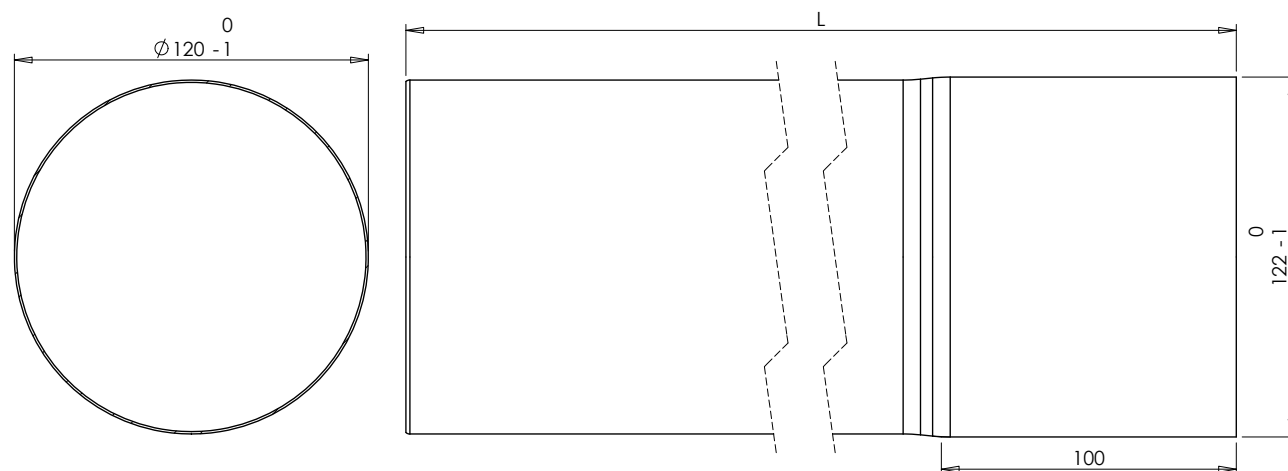

Synoniem van KWALITEIT en
SERVICE

APOK KAMPENHOUT
administratieve hoofdzetel
Oudestraat 11, B-1910 Kampenhout
Tel.: +32 (0)16 61 72 62 - Fax: +32(0)16 61 72 81
Website: www.apok.be - E-mail: info@apok.be

